


Rev.	Description	Initiator	Date
03	ECO 14323: Increased tolerance on dowel hole positions from ± 0.013 to ± 0.025	SZJ	3/28/2016




- Notes:
1. Material: Stainless Steel.
 2. Tool and Mounting Adapters have M3 tapped holes and 3mm dowel pin holes for interfacing.
 3. **WARNING: DO NOT LOOSEN OR REMOVE INTERFACE PLATES DUE TO POTENTIAL DAMAGE.**
 4. Standard connector (not shown) has 17mm diameter & is 67.5mm long.
 5. Cable is IP65/IP68 rated only at transducer end.

NOTES: UNLESS OTHERWISE SPECIFIED.
DO NOT SCALE DRAWING. ALL DIMENSIONS ARE IN MILLIMETERS.

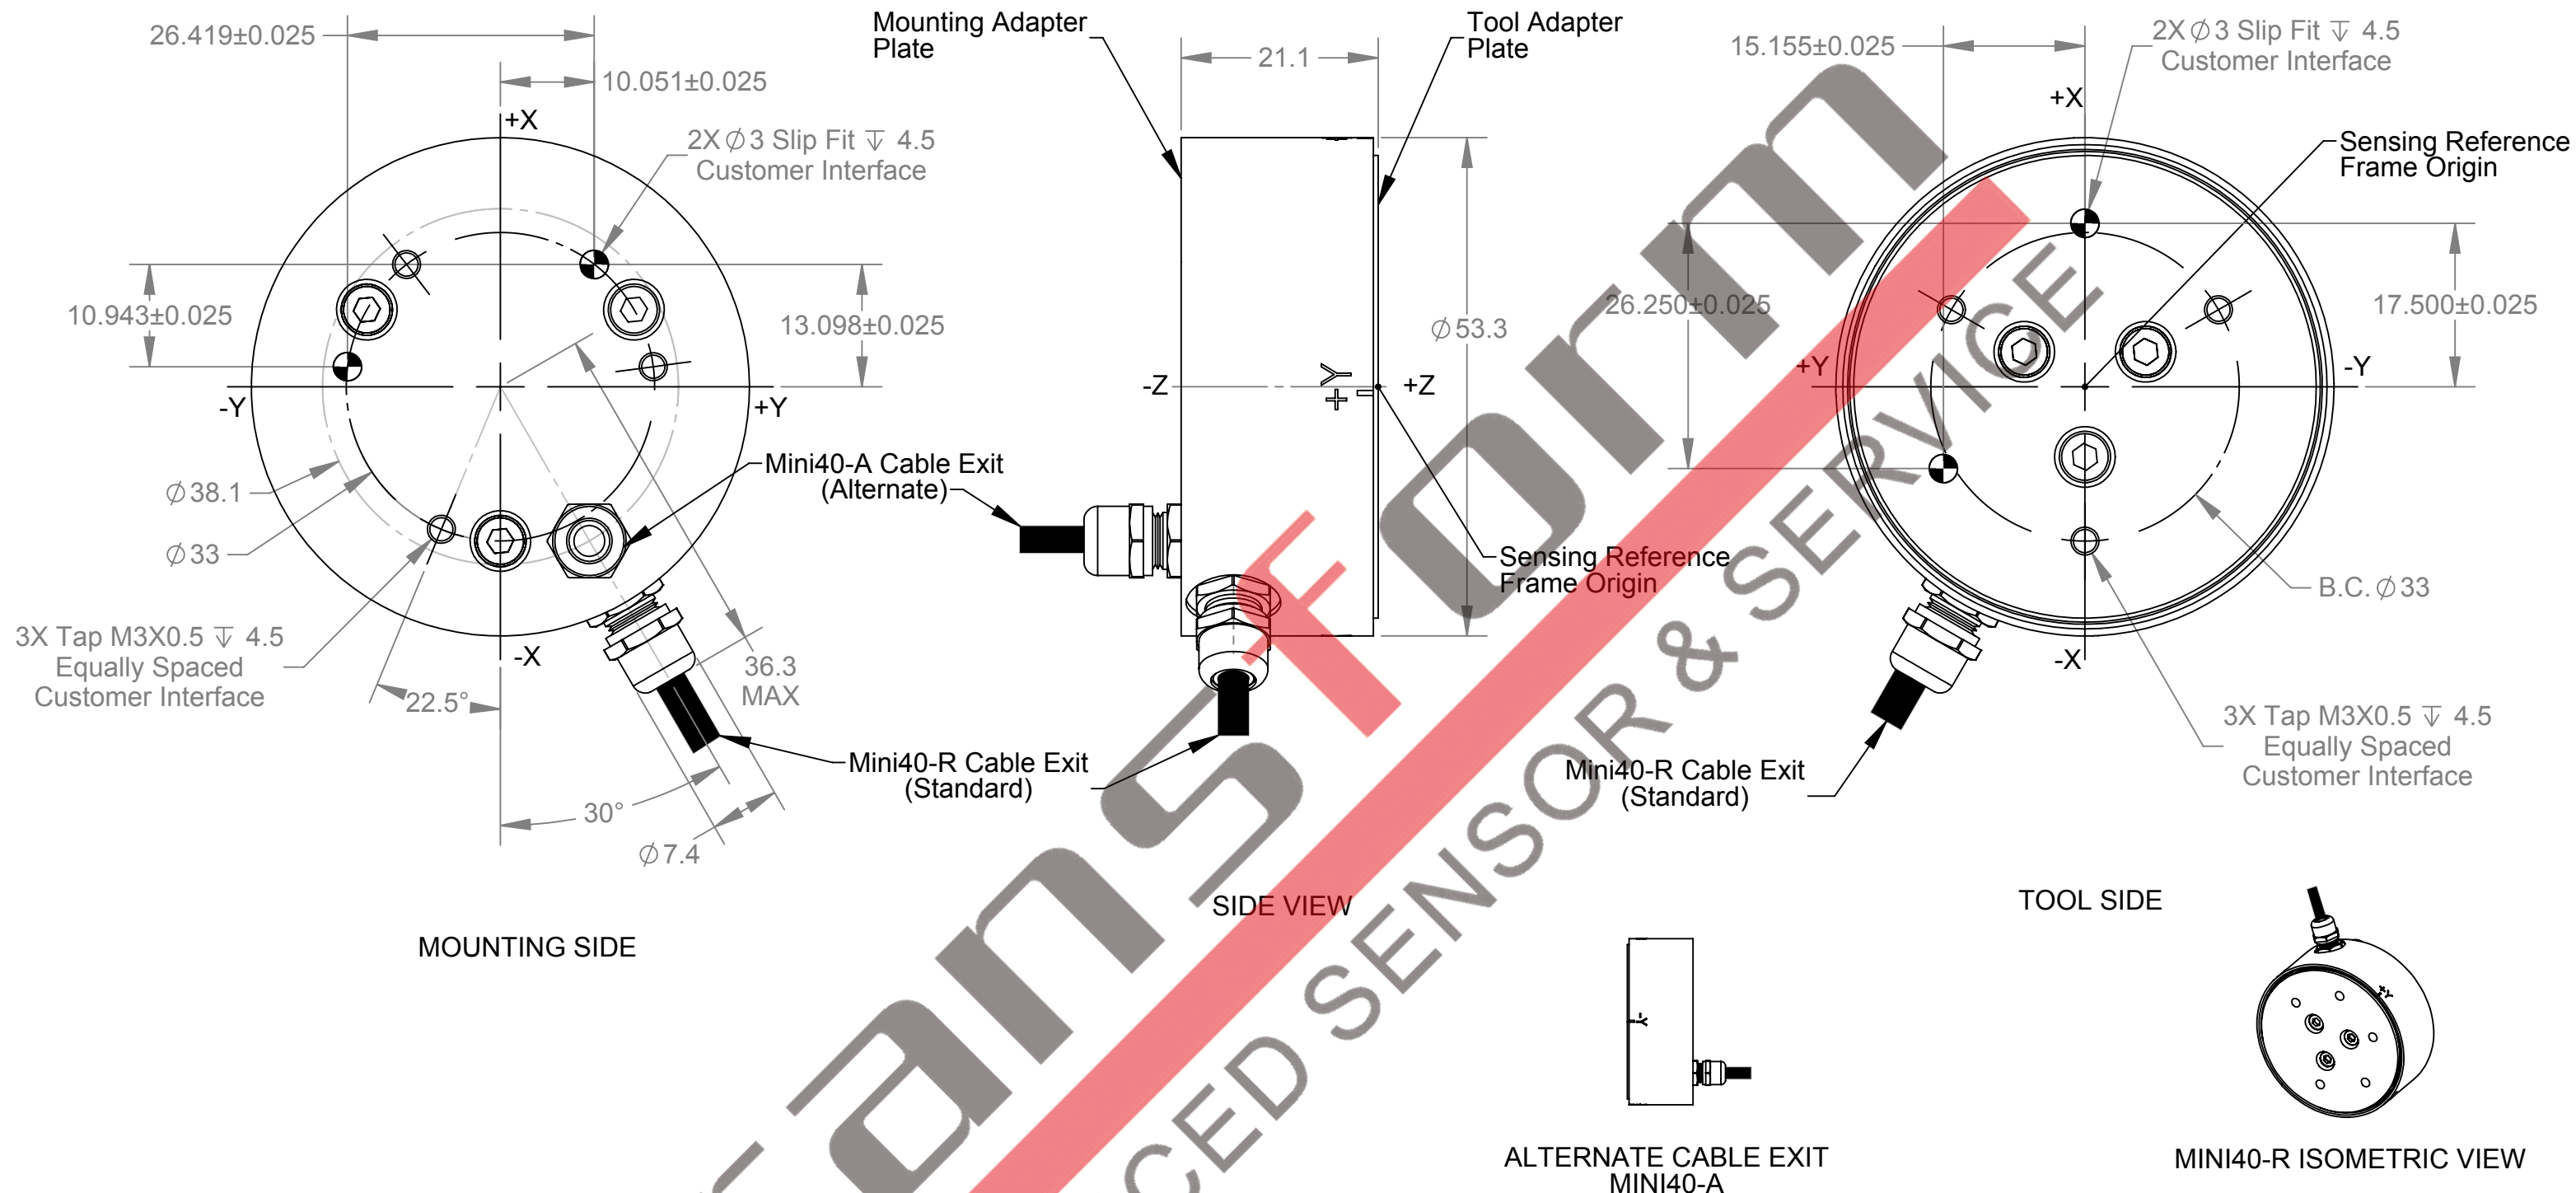

1031 Goodworth Drive, Apex, NC 27539, USA
Tel: +1.919.772.0115 Email: info@ati-ia.com
Fax: +1.919.772.8259 www.ati-ia.com
ISO 9001 Registered Company

PROPERTY OF ATI INDUSTRIAL AUTOMATION, INC. NOT TO BE REPRODUCED IN ANY MANNER EXCEPT ON ORDER OR WITH PRIOR WRITTEN AUTHORIZATION OF ATI.



DRAWN BY: R. Chambers 3/9/12		TITLE	
CHECKED BY: J. Walser 3/9/12		IP65/IP68 Mini40 Transducer	
PROJECT #	110516-2	SHEET	1 OF 1
SCALE	3:2	SIZE	B
DRAWING NUMBER	9230-05-1421	REVISION	03